



Fixed Warning Lines

for Roof Metal Decks




The **Fixed Warning Line System** is intended to permanently attach to various types of metal roofs such as **Standing Seam** roof, **R-Panel** roof, and **Corrugated Deck** roof. Easy to install and forms an OSHA fall protection system. The system is designed to keep workers away from areas they shouldn't be.

Standing Seam Roofs

The base mechanically attached, non-piercing system is compression-fit to the vertical seams of standing seam metal roofs without puncturing the metal panel itself.

Corrugated Deck & R-Panel Roofs

The base mechanically attached system is screwed down to the metal roof panel with self-sealing screws.

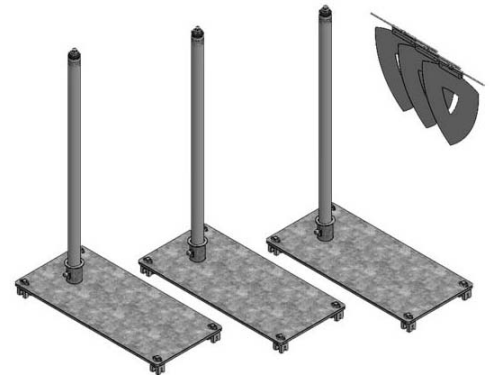


[LINK TO INFO & PRICING](#)

Features & Benefits



- Non-piercing, clamp-on attachment to Standing Seam ribs.
- Galvanized Finish Standards.
- Self-sealing screw down attachment for R-Panel and Corrugated metal roofs.
- Plastic-coated Galvanized Cable & Aluminum Pennants.

System Components

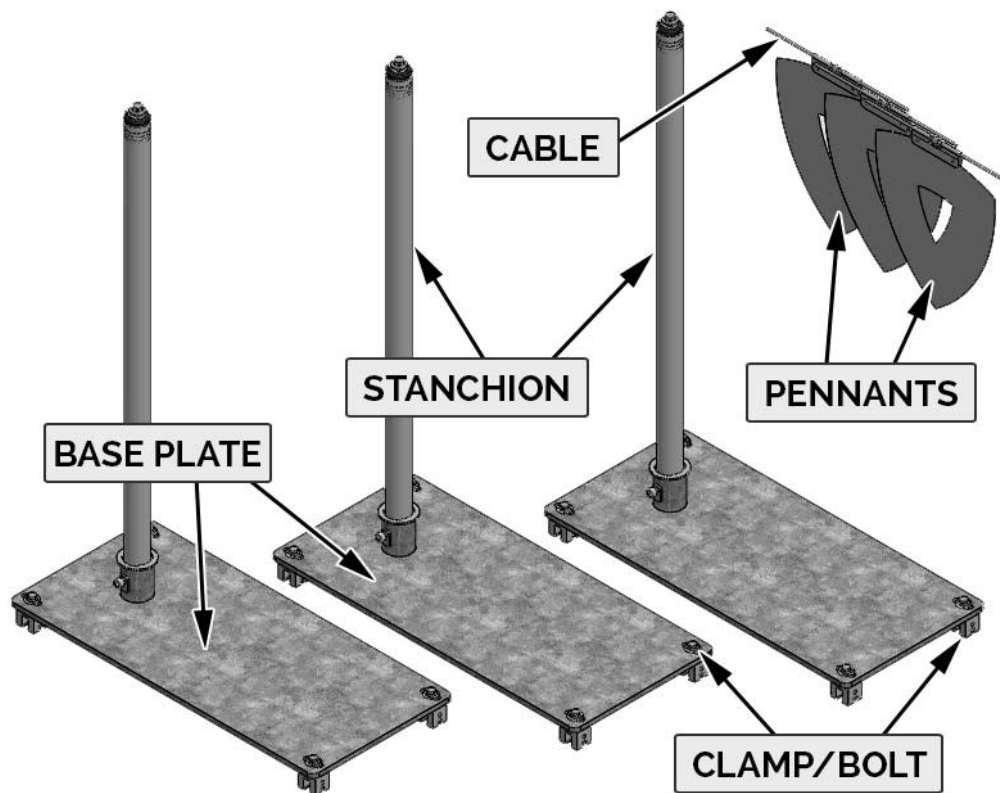


Models


Item # (SKU)	Product Variations
SRC-400742-KIT	16"-18" Standing Seam Kit – Galvanized Includes: (4) 16"-18" base plates, (4) stanchions, (1) 100' Cable w/pennants
SRC-400741-KIT	24" Standing Seam Kit – Galvanized Includes: (4) 24" base plates, (4) stanchions, (1) 100' Cable w/pennants
SRC-400743-KIT	12" R-Panel Kit – Galvanized Includes: (4) 12" base plates, (4) stanchions, (1) 100' Cable w/pennants
SRC-400744-KIT	12" Corrugated Deck Kit – Galvanized Includes: (4) 12" base plates, (4) stanchions, (1) 100' Cable w/pennants

Additional Bases with Stanchions		Link
SRC-400748	16"-18" Standing Seam Base w/Stanchion only	BUY
SRC-400747	24" Standing Seam Base w/Stanchion only	BUY
SRC-400749	12" R-Panel Base w/Stanchion only	BUY
SRC-400750	12" Corrugated Deck Base w/Stanchion only	BUY


Types of Metal Roof Kits

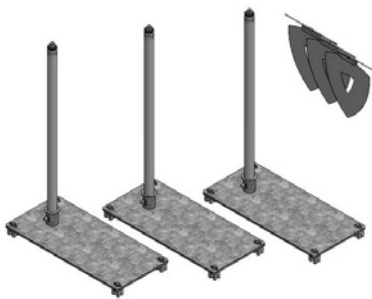

Standing Seam Roofs

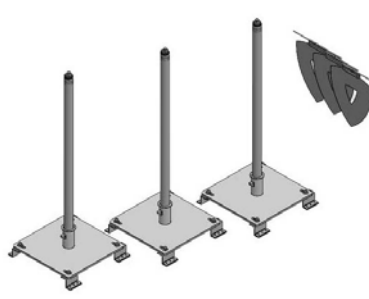


R-Panel Roofs

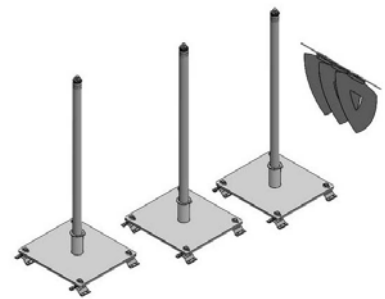

Corrugated Deck Roofs

SYSTEM SETUP GUIDELINES - important – please read!

- Place bases at required intervals of 33 feet or less.
- 39" Flag height as per OSHA guidelines.
- The minimum distance from the roof leading edge must be 15 feet.
- Maximum allowed roof slope up to a 1:12 pitch.
- OSHA Regulations – 1926.501(b)(10), 1926.501(b)(1), 1926.501(b)(2), 1926.502(b), 1926.502(f)(2).

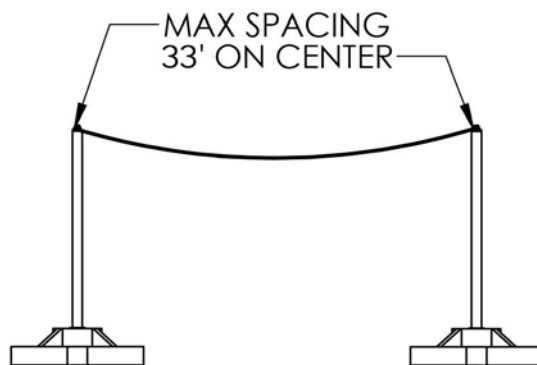

!! CAUTION !! This is a fall protection system. The system must be used in strict conformance with the manufacturer's instructions. Failure to do so may result in serious injury or death.

Information Needed to Quote

By providing some basic information we can provide you with a custom proposal. Pictures and sketches are very helpful and if you prefer to speak with a fall protection expert just call or send us an e-mail. Fill out our [Request a Quote](#) form on our website to send us your information.



Phone: (951) 465-7386

Website:

<https://caisafety.com>

Email:

webstore@caisafety.com

Some of Our Clientele

