



# Non-penetrating Skylight Guardrail

for Rooftop Skylights



## PRODUCT LITERATURE

The **Non-penetrating Skylight Guardrail** is one more unique way to guard a skylight. The system surrounds the skylight with a 42" high barrier that compression fits against the skylight curb.

Many building owners and architects don't want a cage covering the skylight or anything impeding the view when people look up. The skylight Guardrail fits the bill by keeping its structure away from the lens, yet it's tall and strong enough to meet all applicable OSHA standards.

### Numerous sizes available:

More than 80 different sizes have been provided to suit almost every skylight size.



[LINK TO INFO & PRICING](#)

# Features & Benefits



- More than 80 different sizes have been provided to suit almost every skylight size.
- Fits skylights up to 90" wide x 120" long.
- Does not block exterior light.
- The product is designed to protect around your skylight without any penetration to prevent roof leaks.
- Product is designed to survive in an industrial environment with galvanized finish and components.
- Perfect for high wind areas.
- Products are OSHA & CAL-OSHA Compliant.
- Easy to transport and assemble for temporary jobsite protections.
- 100% made in USA

## OSHA Skylight Regulations

**Please Note:** OSHA compliance for all widths and lengths; Cal-OSHA compliance up to 52" wide only.

### 1910.23(a)(4)

Every skylight floor opening and hole shall be guarded by a standard skylight screen or a fixed standard railing on all exposed sides.

### 1910.23(e)(8)

Skylight screens shall be of such construction and mounting that they are capable of withstanding a load of at least 200 pounds applied perpendicularly at any one area on the screen. They shall also be of such construction and mounting that under ordinary loads or impacts, they will not deflect downward sufficiently to break the glass below them. The construction shall be of grillwork with openings not more than 4 inches long or of slat work with openings not more than 2 inches wide with length unrestricted.

### 1926.501(b)(4)(i)

Each employee on walking/working surfaces shall be protected from falling through holes (including skylights) more than 6 feet (1.8 m) above lower levels, by personal fall arrest systems, covers, or guardrail systems erected around such holes.

### 1926.501(b)(4)(ii)

Each employee on a walking/working surface shall be protected from tripping in or stepping into or through holes (including skylights) by covers.

1926.501(b)(4)(iii)


Each employee on a walking/working surface shall be protected from objects falling through holes (including skylights) by covers.

## Sizes

**ALL WIDTHS:** 48", 54", 60", 66", 72", 78", 84", 90", 96"

**ALL LENGTHS:** 48", 54", 60", 66", 72", 78", 84", 90", 96"

### SIZING YOUR SKYLIGHT

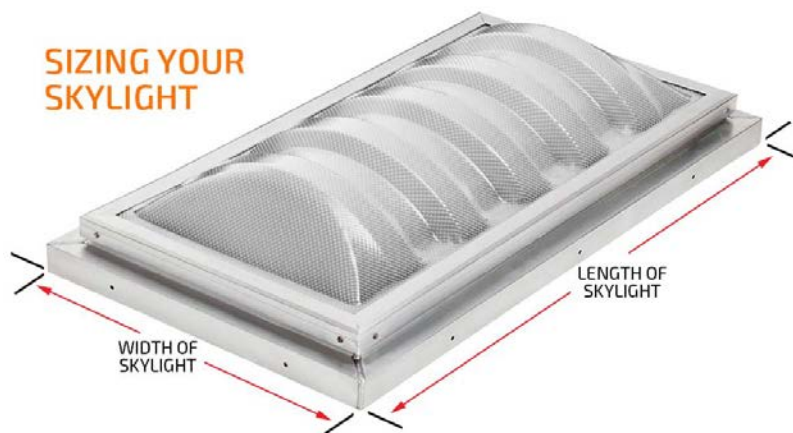

## Information Needed to Quote

By providing some basic information we can provide you with a custom proposal. Pictures and sketches are very helpful and if you prefer to speak with a fall protection expert just call or send us an e-mail. Fill out our [Request a Quote](#) form to send us your information.



**Phone:** (888) 246-6999

**Website:**

<https://caisafety.com>

**Email:**

[info@caisafety.com](mailto:info@caisafety.com)  
[webstore@caisafety.com](mailto:webstore@caisafety.com)